


请客户签字回传:

版本	更改内容:	设计日期:
00	FIRST ISSUE	2011.4.28
01	增加铁框型号新增	2017.07.31

PIN NO.	NAME
1	VSS
2	VDD
3	RST
4	CS
5	RS
6	RD
7	WR
8	D7
9	D6
10	D5
11	D4
12	D3
13	D2
14	D1
15	D0
16	LEDA
17	LEDK
18	VSS

由 Autodesk 教育版产品制作

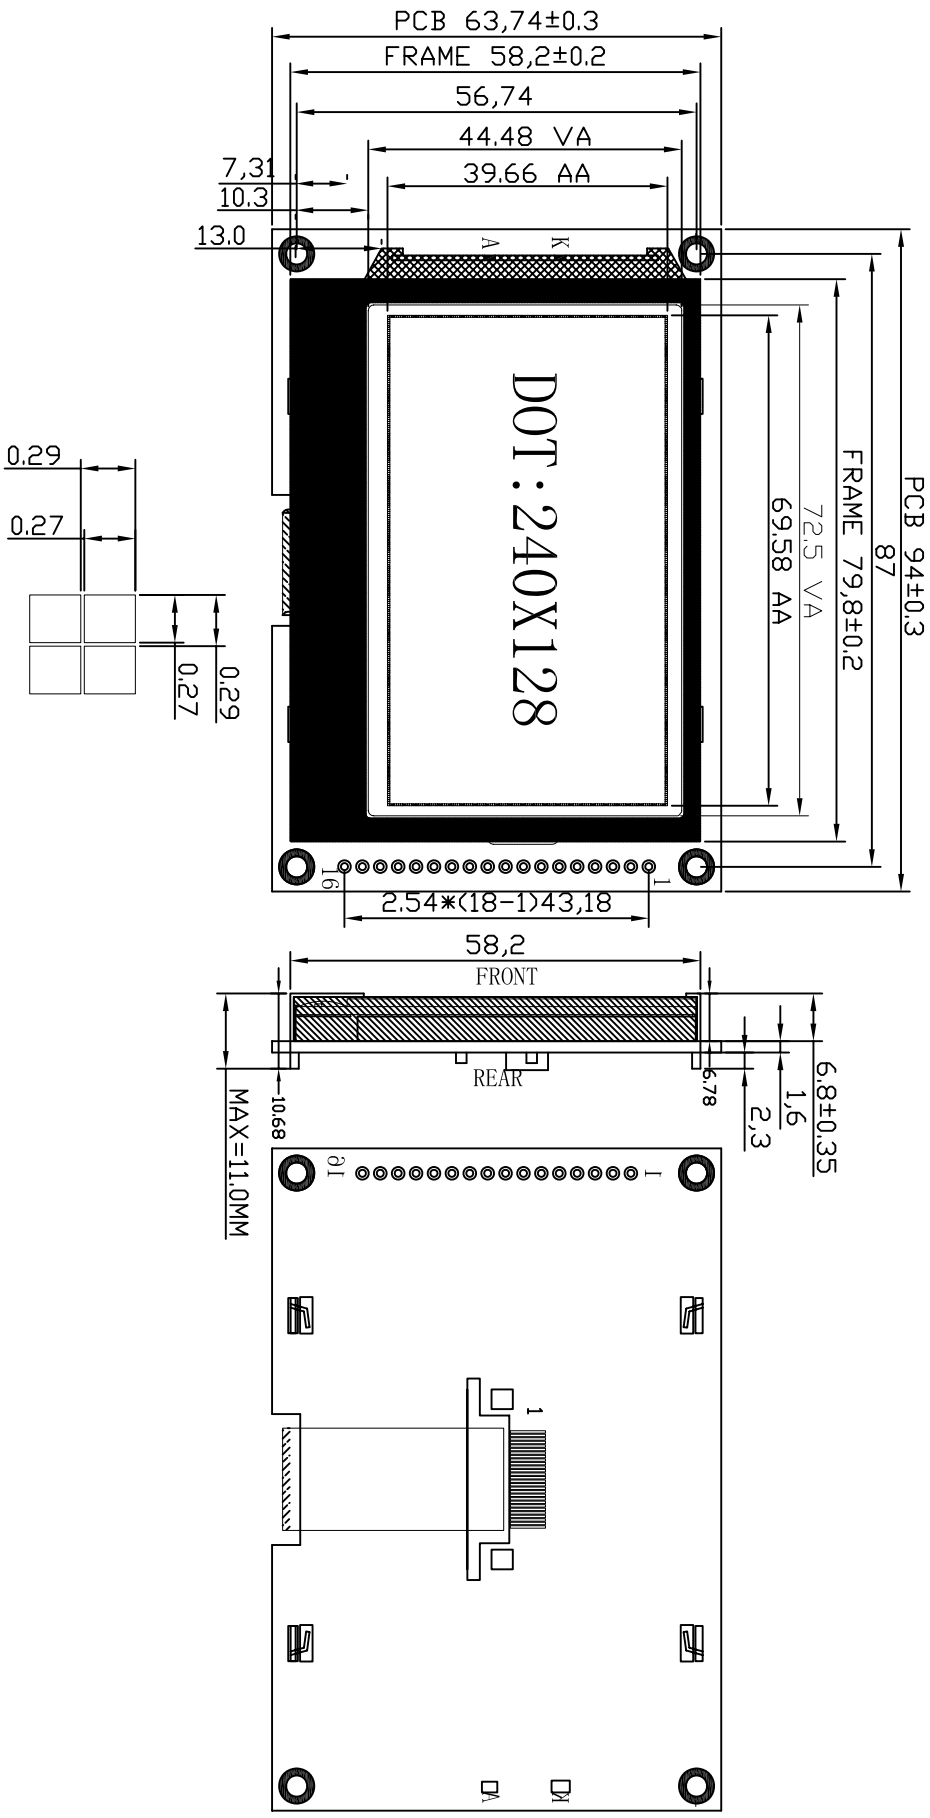

- NOTE:
- 1.DISPLAY TYPE: FSTN
 - 2.LCD POLARIZER TYPE: POSITIVE/TRANSFLECTIVE
 - 3.VIEWING DIRECTION: 6 O'CLOCK
 - 4.LCD OPERATING VOLTAGE: VDD:3.3V VLCD:16.0 V
 - 5.DRIVE METHOD: 1/128DUTY,1/12BIAS
 - 6.OPERATING TEMP: -20 ~ +85°C
 - STORAGE TEMP: -30 ~ +85°C
 - 7.LCD CONNECTOR: COG(LCD+FPC)
 - 8.DISPLAY DRIVER: UC1638C
 - 9.BACKLIGHT: 5PCS 3020 SMD WHITE COLOR
 - 10.UNSIGNED TOLERANCE: ±0.3

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

		<h2>深圳市兴宇合电子有限公司</h2>	
<h1>LCM工程图</h1>		<p>MODEL NUMBER: JGG240128A01</p>	
SCALE: 1:1	UNIT: mm	PROJECTION:	DATE: 2016.07.31
页数: 1/01	允许公差: 0.3mm	比例: 1:1	日期: 2016.07.31
审核:	日期:	初稿:	日期:
DO NOT SCALE THESE DRAWING.		ZAS	